


DSP302 NEW

Fanless Digital Signage Player with Intel® Celeron® Processor N6210/J6413, 3 HDMI, 4 USB, and 1 GbE LAN

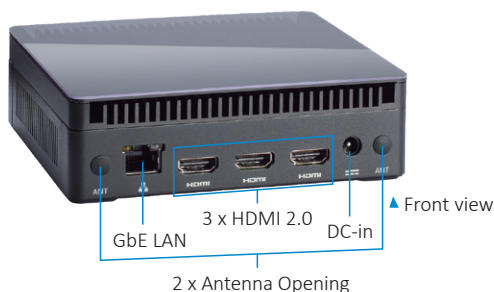

Features

- Intel® Celeron® processor N6210/J6413
- 4GB LPDDR4 memory onboard (8GB optional)
- 3 HDMI 2.0 in support of 4K resolution
- 4 USB and 1 GbE LAN
- 1 Full-size Mini-PCle for WIFI/BT/3G/4G
- 1 M.2 Key B & M 2242 for SATA/PCle



Specifications

CPU	Intel® Celeron® processor N6210/J6413
System Memory	LPDDR4 4GB memory onboard (8GB optional)
Chipset	SoC integrated
BIOS	AMI
Graphics	Intel® UHD Graphics
Storage	1 x 64GB eMMC onboard (128G optional) 1 x M.2 Key B & M 2242 for SATA/PCle
TPM	Integrated TPM 2.0
WatchDog Timer	255 levels, 1 to 255 sec./min.
System I/O Outlet	4 x USB 3.2 Gen 2 1 x GbE LAN 3 x HDMI 2.0 (CPU: J6413) 2 x HDMI 2.0 (CPU: N6210) 1 x Audio jack (combo) 1 x DC power input 1 x Power switch 2 x Antenna opening
Expansion Interface	1 x Full-size Mini-PCle for WIFI/BT/3G/4G 1 x M.2 key B & M 2242 for SATA/PCle 1 x SIM card slot
Battery Lithium	Lithium 3 V/220 mAH
Fanless	Yes
Power Input	+12V DC-in
Dimension	106.2 mm (4.19") x 133 mm (5.24") x 39 mm (1.54")
Weight (net/gross)	0.9 kg/1.5 kg

Specifications

Certifications	CE, FCC class A
Operating Temperature	0°C to +45°C
Operation Humidity	10%- 90% relative humidity, non-condensing
EOS support	Windows 10 (64bit) /Windows 11 (64bit) /Linux Ubuntu (64bit)

Packing List

1 x Power adapter

Ordering Information

Standard

DSP302-J6413	Fanless 4K digital signage player with Intel® Celeron® processor J6413, 3 HDMI, 4 USB, 1 GbE LAN, 4GB LPDDR4, and 64GB eMMC
DSP302-N6210	Fanless 4K digital signage player with Intel® Celeron® processor N6210, 2 HDMI, 4 USB, 1 GbE LAN, 4GB LPDDR4, and 64GB eMMC

Dimensions

