Miniature Capsule Slip Ring LPM-12J

This unit can be used in any electromechanical system that requires unrestrained, continuous rotation while transferring power or data from a stationary to a rotating structure. It is also called a rotary electrical interface, commutator, collector, swivel or an electrical rotary joint. It can improve electromechanical capability, simplify system design, eliminate possible damage while rotation.

The LPM-12J miniature slip ring is a standard, off-the-shelf unit that uses gold contacts at the rotary interface. Color-coded lead wires are used on both the stator and rotor for simplifying electrical connections. The LPM-12J allows tremendous flexibility in dealing with system size restrictions. It is available in 1-12 circuit configurations.



TEMPE -20° C to 60° C

Applications

- **V** Electrical test equipment
- Manufacturing and process control equipment
- Indexing tables
- CCTV pan / tilt camera mounts
- **Robotics**, rotary sensors, urgent illumination equipmen
- **Exhibit** / display equipment/Closed-circuit control
- Aviation , military , instrument, medical equipment.
- Min-type wire-rolling machine / Wind turbine generator

Specifications

Operating Speed	0-300 rpm
Number of Circuits	12
Voltage	240 VAC/DC
Current Rating	2 amps per circuit
Temperature Range	-20℃ to +60℃
Contact Material	Gold to Gold
Lead Size	30# silver plated copper
Lead Length	Standard 250 mm (9.843inch)
Dielectric Strength	≥500 VAC @50Hz, between each circuit
Insulation Resistance	100 MΩ @ 500 VDC
Electrical Noise	1mΩ Min

Capsule Length						
# of Circuits	L (mm)	Part No				
12	20.00	LPM-12J				



The operating life of the unit depends upon temperature, rotation speed and environment.

- ✓ 12 circuits models
- **2** amps per circuit ,240VAC/DC
- Precision assembly to provide exceptional rotational life
- Speed up to 300 rpm continuous
- Gold-Gold contacts
- Flexible, color-coded, silver-plated, lead wires
- Superior handling of low level control signals
- Metal housing optional



MAXIMUM OPERATING SPEED 0-300 RPM





www.slipring.cn

3-ø2.5 EQS

Rotor Wires

4±0.2

Drawings

Ø18.2±0.1

Advantage



- **V** Low torque minimize system torque budget
- **Compact design to fit in the most demanding space.**
- Smooth running
- ✓ Low electrical noise
- **V** Quick shipment per your urgent requirement
- **360** continuous rotation
- **W** High bandwidth transfer capability
- Additi
- V Quick

tion of special components						
k s	shipmen	t				
V	/re Color	Code				
	Ring #	Color	Ring #	Color	Ring #	Color
	#2	BRN	#3	RED	#4	ORG
	#6	GRN	#7	BLK-BLU	#8	PUR
	#10	WIT	#11	PINK	#12	AZURY
	#14	WIT/BRN	#15	WIT/RED	#16	WIT/ORG
	#18	WIT/GRN	#19	WIT/BLU	#20	WIT/PUR

JINPAT

Wire Size	Ring #	Color	Ring #	Color	Ring #	Color	Ring #	Color
AWG17# silver plated copper Teflon UL	#1	BLK	#2	BRN	#3	RED	#4	ORG
	#5	YEL	#6	GRN	#7	BLK-BLU	#8	PUR
	#9	GRAY	#10	WIT	#11	PINK	#12	AZURY
	#13	WIT/BLK	#14	WIT/BRN	#15	WIT/RED	#16	WIT/ORG
	#17	WIT/YET	#18	WIT/GRN	#19	WIT/BLU	#20	WIT/PUR
	#21	WIT/GRAY	#22	CLAR	#23	BLK-RED	#24	BLK/BRN

Remarks: 1. AWG28# silver plated copper Teflon UL, 24 different color single wires for a circle

2. #1 from rotor side (The color if the wire can be changed).

Contact us on wire color codes



Wind turbine slip ring

Hydraulic slip ring


Pneumatic slip ring

Coaxial rotary joints



Model: LPM-12J

Rotor Side | Stator Side

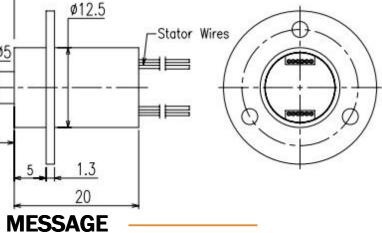

about slip ring, please leave your message to get a professional solution

Circuits

- Current&voltage
- Signal details
- Dimension
- Working speed
- Working temperature
- Operating
- Environment

Other

Surveillance Crane Medical Marine Defence Radar antenna Automation Meter and instrument Wind turbine generator **VR** Device Other

