


NH30

Rugged Fully Managed 29 Gbit/s Ethernet Switch

Modular Embedded Switch for Industrial Automation & Railway Transport

- » Compact 4U, 40 HP turn-key Layer 2/3 switch solution
- » Rack-mounted or wall-mounted
- » Fanless operation or forced-air cooling
- » Single or redundant power supplies or uninterruptible power supply (AC or DC)
- » Up to six slots for RJ45, M12 (A or X-Coded) or SFP line cards
- » PoE+ / non-PoE power sourcing Ethernet ports in mixed configuration
- » Switch firmware production-ready installed
- » System supervision (temperature, fan, power supply) optional
- » EN 50155 class TX compliant (railways)

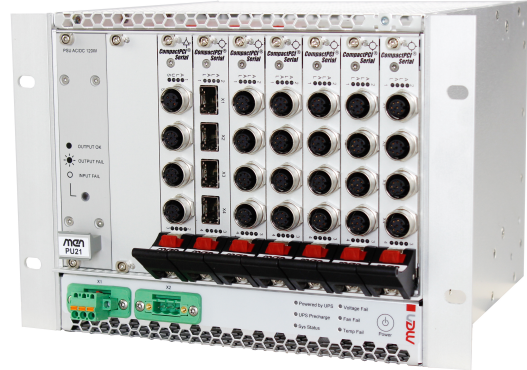

The NH30 is a modular turn-key network switch with carrier grade Layer 2 and Layer 3 VLAN routing capabilities with a seamless throughput of 29 Gbit/s. It is designed for use in trains, trams or industrial environments.


Flexible Built-to-Order I/O Configuration The high-performance switch device is a modular 4U, 40 HP CompactPCI Serial system. Its build-to-order concept offers a wide range of configuration options, resulting in low NRE costs and fast time-to-market. The main switch board occupies one slot, while six option boards configure front-panel connectivity. This concept allows the NH30 to come with M12 A-coded (X-coded variants in preparation), RJ45 and SFP interfaces in mixed fiber/copper configurations. It supports a total of 25 ports. The switch firmware is already installed and is ready for operation. Using high-speed SFP interfaces ensures robustness against any type of interference signal or other conducted emissions like bursts or flashes. This makes the switch suitable for uplink scenarios or backbone solutions in harsh environments.

Standard Protocols and Various Power Supply Options As an option all copper-based port line cards can act as PoE+ (PoE class 4) power supplies with a maximum of 60 W per card. The NH30 supports IEEE1588v2 and SyncE (as future extension) timing protocols and EEE as a standard on all ports. Two PSU slots, each with its own power source, ensure reliability and redundancy. Single or redundant AC or DC power supplies or an uninterruptible power supply (UPS) can be implemented. This hardens the system against power fluctuations or power failures.

External Monitoring with an Optional Shelf Controller A shelf controller rounds out the switch's self-control and self-monitoring capabilities. It manages lifetime information about the shelf fans, power supplies and can be used for manual shutdown. For security and monitoring purposes, the shelf controller data is available via network interfaces and CLI.

Mounting and Cooling Options The NH30 switch can be wall or rack-mounted and is cooled by natural convection or, when no PoE supply is necessary, using an additional fan tray at the bottom of the system. Cooling is independent of the mounting position.


Slot	1	2	3	4	5	6
PSU	PSU	Ethernet Switch	I/O	I/O	I/O	I/O

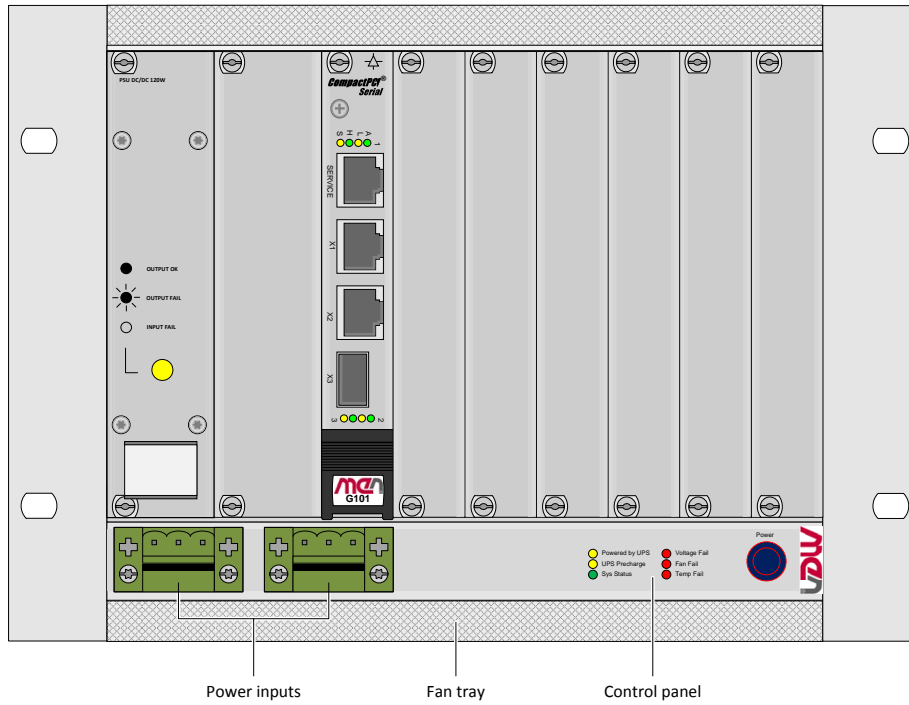

NH30 Configuration Example 1

Basic configuration with RJ45 and SFP plug on switch front panel

The control panel is only available with the optional shelf controller

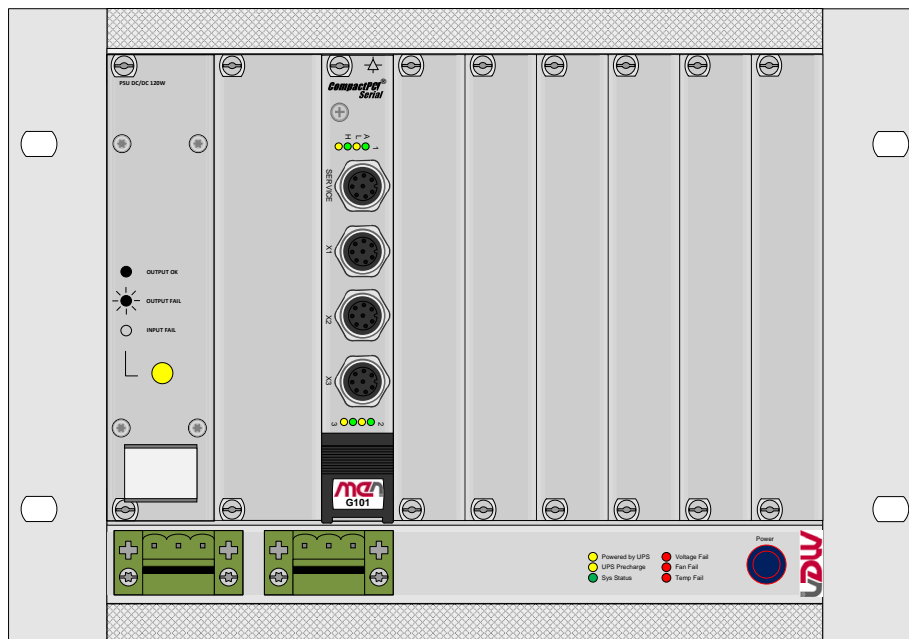

NH30 Configuration Example 2

Basic configuration with M12 on switch front panel

The control panel is only available with the optional shelf controller

General System Characteristics

- Modular design, built-to-order configuration
- Slot and backplane set-up of the system
 - 2 PSU slots
 - 1 CompactPCI Serial based system slot (Switch Board)
 - 6 CompactPCI Serial based peripheral slots
 - All peripheral slots are capable of supporting a mix of various types of connectors (RJ45, M12, SFP)
 - All peripheral slots offer additional PoE+ support
- Please contact MEN sales for component combination possibilities.

Ethernet Switch

- CPCI 3U Board
- Configurable: yes
- Managed flexible multiport Gigabit Switch, 29 GBit/s Switch matrix, -40 to +85°C with qualified components
 - [More information on the G101 Managed Industrial Ethernet Switch with Uplink](#)
- Possible Configurations
 - 25-Ports, 2x RJ45 + 1x SFP 2.5 Gbps on front, 10x GE + 3x QSGMII links on backplane
 - 24-Ports, 3x M12 A-coded on front, 9x GE + 3x QSGMII links on backplane

Gigabit Ethernet SFP Line Card

- CPCI 3U Board
- Configurable: no
- Possible in I/O slots: 1, 2 and 3
- 4 HP Gigabit Ethernet PHY Line Card with four Gigabit Ethernet ports on SFP cages, QSGMII to 4 x SFP 1GB line card EEE and Sync-E support, -40 to +85°C, qualified
 - [More information on the GP2 4-Port Gigabit SFP PHY Line Card](#)

Gigabit Ethernet Copper PHY Line Card

- CPCI 3U Board
- Configurable: yes
- Possible in I/O slots: 1, 2 and 3
- Possible Configurations
 - 4 x Gigabit Ethernet RJ45 ports, QSGMII, no PoE, EEE and Sync-E support, -40 to +85°C
 - 4 x Gigabit Ethernet RJ45 ports, QSGMII, PoE+ PSE, EEE and Sync-E support, -40 to +85°C
 - 4 x Gigabit Ethernet M12 A-coded ports, QSGMII, no PoE, EEE and Sync-E support, -40 to +85°C, conformal coated
 - 4 x Gigabit Ethernet M12 A-coded ports, QSGMII, PoE+ PSE, EEE and Sync-E support, -40 to +85°C, conformal coated

Gigabit Ethernet Copper Line Card

- CPCI 3U Board
- Configurable: yes
- Possible in I/O slots: 4, 5 and 6
- Possible Configurations
 - 4 x Gigabit Ethernet RJ45 ports, passive, no PoE, -40 to +85°C
 - 4 x Gigabit Ethernet RJ45 ports, passive, PoE+, -40 to +85°C
 - 4 x Gigabit Ethernet M12 A-coded ports, passive, no PoE, -40 to +85°C, conformal coated
 - 4 x Gigabit Ethernet M12 A-coded ports, passive, PoE+, -40 to +85°C, conformal coated

Power Supply

- PSU 3U
- Configurable: yes
- Possible Configurations:
 - 120 W, 3U 6 HP PSU, wide range input 24 to 110 V DC, 24 V DC nom., output 12 V / 5 V / 3.3 V DC, -40..+85°C, qualified, conformal coating
 - 120 W, 3U 6 HP PSU, wide range input 100 to 240 V AC, output 12 V / 5 V / 3.3 V DC, -40..+85°C, qualified, conformal coating
- Two separate power inlet connectors
- Normal operation if at least one external voltage is present

Supervision and Control (Option)

- Dedicated shelf controller monitors power, CPU status, temperature; controls fan; provides status LEDs and power button
 - [More information on AF2 Shelf Controller for CompactPCI Systems](#)

System Management

- Remote management: Switch is manageable remotely via Ethernet and USB console
- Watchdog
- CPU temperature: mirrored through Switch firmware to SNMP table space, readable through management interfaces

Switching Matrix

- 29 Gbit/s switching matrix for seamless throughput on all ports
- TCAM based store-and-forward switching
 - TCAM High-Speed switching (Ternary Content-Addressable Memory)

Protocols and Functionality

- General Network Support
 - IPv4 support for transport and management
 - IPv6 support for transport and management
- DHCP
 - DHCP Option 82
 - DHCP Proxy
 - DHCP snooping
- DNS
 - DNS Client
 - DNS Proxy

Ports and Port Control

- Energy Efficient Ethernet (IEEE 802.3az) on all ports

Switch Management and Monitoring

- SNMP v1, v2c and v3 configuration
- RMON 1, 2, 3 and 9 configuration
- LLDP
 - IEEE 802.10AB-2005 Link Layer Discovery
 - TIA 1057 LLDP-MED extension
- sFlow Agent for real time statistics collection
- OAM
 - IEEE 802.30ah Link and Flow OAM
 - IEEE 802.1ag
 - ITU-T Y.1731 Up- and Down-MEP and MIB
- HTTP/HTTPS
 - Fully Web manageable through HTTP and HTTPS protocol

Redundancy and Flow Control

- Spanning Tree (STP)
 - Spanning Tree, Multiple Spanning Tree and Rapid Spanning Tree with filter tables
 - BPDU Guard and Restrict Role
- Loop Protection
 - Loop detection as configuration option
- Protection Switching
 - Secure Ring Protocols: ITU-T G.8031: 1+1; 1:1: 1:N Ethernet Linear Protection Switching and G.8032v2/Y.1344: Ring and Multiple Ring Protection Switching <50 ms
- Ethernet Virtual Connections
 - BP EVC Services E-Line, E-Lane, E-Tree
- Link Aggregation
 - Static and IEEE 802.3ad Link Aggregation

Security

- Single and Multiple IEEE 802.1X
- MAC based
- RADIUS
- TACACS+
- ACL based security protocols

VLAN

- Port and IP subnet based VLAN routing, tagging, re-tagging and priority management
- VLAN Trunking, GARP VLAN Registration (GVRP)
- Multicast VLAN Registration (MVR)
- Voice over IP
 - VOICE VLAN and Auto Voice over IP prioritization

Multicast/IPMC

- VLAN an Port based IGMP/MLD Multicast and Multicast Proxy for IPv4 and IPv6
- SSM filtering
- IPMCv4 and IPMCv6 flood suppression
- IGMP Querier
- Explicit Router port handling

QoS

- Port, Queue, MEF, VCAP, EVC policers
- Port and Queue ingress and egress shapers
- Diffserv marking and remarking

Synchronization

- IEEE 1588v2 Precision Time Protocol
 - 1588v2/PTP support on ports 1 to 12 with one and two-step clocks
 - 1588v2/PTP support on ports 13 to 25 (depending on line card variant)
- SyncE
 - SyncE Slave on all ports planned as a future extension
- Time Protocols
 - NTP Client, PTP Client

Provider Bridging

- IEEE 802.1d, 802.1ad and 802.10d Q-in-Q Provider Bridging

Layer 3 Support

- Layer 3 classification for i.e. SIP, IP Prot, SProt and DProt based protocols,

Electrical Specifications

- Supply voltage
 - 24 V, 36 V, 48 V, 72 V, 96 V, 110 V DC nominal; 14.4 to 154 V max. (EN 50155)
 - Power interruption class S2 (10 ms) (EN 50155)
- Power Consumption
 - The power consumption depends on the selected PSU configuration
 - Less than 30 W in default configuration
 - Less than 100 W without PSU
 - Less than 550 W in max. PoE load condition (depending on used PSUs)
 - Less than 100 W with 6 line cards without PoE
 - For example, when used together with two PU20 (or PU21) PSUs, the maximum PoE power of about 120 W can be expected.

Mechanical Specifications

- Dimensions
 - 210 x 175 x 225 mm max. without brackets
 - 4U, 40 HP
- Mounting Possibilities
 - Wall-mount
 - Rack-mount in 19" cabinet
 - Two systems side-by-side to build a single 19" chassis

Environmental Specifications

- Classification for railway applications
 - EN 50155: Rolling stock, vehicle body
 - Temperature range (operation)
 - EN 50155 class TX in base configuration and when equipped with GE1, GP1 and GP2 cards, without activated PoE supply
 - With fan if the line cards have been configured with the PoE option
 - Without fan if the line cards have been configured without the PoE option
 - Cooling concept
 - Air-cooled, forced convection with fan tray at system bottom
 - Temperature range (storage): -40°C to +85°C
 - Humidity
 - EN 50155: Rolling stock, vehicle body
 - Vibration/Shock
 - EN 50155: Rolling stock, vehicle body class B
 - Altitude: -300 m to +3000 m
 - Conformal coating of board components
 - International Protection Rating (IEC 60529): IP20
-

Safety

- Electrical Safety
 - EN 60950-1: Class I equipment
 - Flammability (PCBs)
 - UL 94 V-0
 - Fire Protection
 - EN 45545, hazard class tbd.
-

EMC Conformity

- EN 55022, EN 50121-3-2, class B (radiated emission)
 - EN 55024, EN 50121-3-2, class A
-

Software Support

- Firmware for configuration and management included

Germany

MEN Mikro Elektronik GmbH

Neuwieder Straße 3-7
90411 Nuremberg
Phone +49-911-99 33 5-0

sales@men.de
www.men.de

USA

MEN Micro Inc.

860 Penllyn Blue Bell Pike
Blue Bell, PA 19422
Phone 215-542-9575

sales@menmicro.com
www.menmicro.com

France

MEN Mikro Elektronik SAS

18, rue René Cassin
ZA de la Châtelaine
74240 Gaillard
Phone +33-450-955-312

sales@men-france.fr
www.men-france.fr

China

MEN Mikro Elektronik (Shanghai) Co., Ltd.

Room 808-809, Jiaxing Mansion, No. 877 Dongfang Road
200122 Shanghai
Phone +86-21-5058-0961

sales@men-china.cn
www.men-china.cn

Up-to-date information, documentation and ordering information:

www.men.de/products/nh30/

The date of issue stated in this data sheet refers to the Technical Data only. Changes in ordering information given herein do not affect the date of issue. All brand or product names are trademarks or registered trademarks of their respective holders.

MEN is not responsible for the results of any actions taken on the basis of information in the publication, nor for any error in or omission from the publication.

MEN expressly disclaims all and any liability and responsibility to any person, whether a reader of the publication or not, in respect of anything, and of the consequences of anything, done or omitted to be done by any such person in reliance, whether wholly or partially, on the whole or any part of the contents of the publication.

The correct function of MEN products in mission-critical and life-critical applications is limited to the environmental specification given for each product in the technical user manual. The correct function of MEN products under extended environmental conditions is limited to the individual requirement specification and subsequent validation documents for each product for the applicable use case and has to be agreed upon in writing by MEN and the customer. Should the customer purchase or use MEN products for any unintended or unauthorized application, the customer shall indemnify and hold MEN and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim or personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that MEN was negligent regarding the design or manufacture of the part.

In no case is MEN liable for the correct function of the technical installation where MEN products are a part of.

© 2017 MEN Holding