

DIAMOND POINT GPS ANTENNA MOUNTS FOR USE WITH TRIMBLE BULLET AND TRIMBLE ACUTIME ANTENNA PRODUCTS

Key Features

- GPS Lightning/Surge Protectors
- For use with Acutime (RS-422) and Bullet Antennas
- Wide range of connector variants
- Supports all GPS bands
- -40°C to +85°C temperature operation




Introduction


We offer a range of mounts (some our own design, some are 3rd party products) which lets you easily mount the either the Trimble Bullet products or Acutime GG product to any surface.



6535S
Universal mount stainless steel.
Standard thread 1" x 14, weight 300 grams.
Height 100 mm. (4")

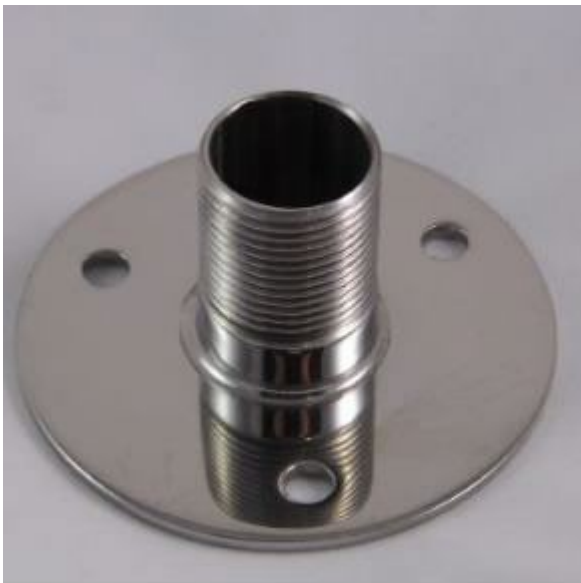

6538S
Universal mount stainless steel.
Standard thread 1" x 14, weight 150 grams.
Height 41.275 mm. (1.625")

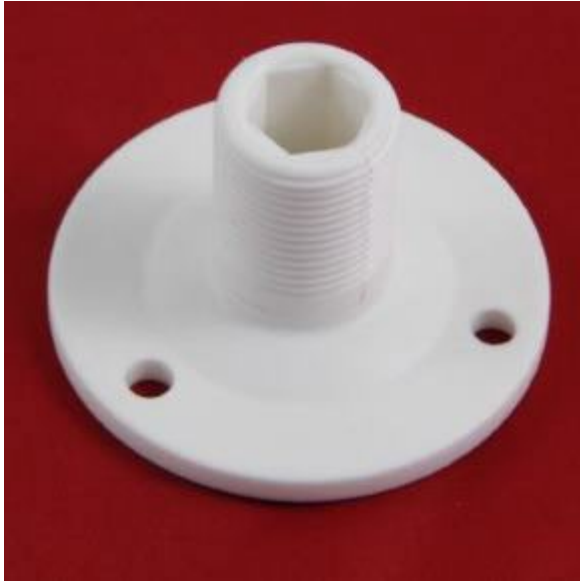

6538N
Universal mount reinforced nylon.
Standard thread 1" x 14, weight 50 grams.
Height 41.275 mm. (1.625")



V9171
Pipe mounting bracket in stainless steel, thread 1"x14.
For horizontal and vertical mount.
Weight 600 gr. For tubes diam. 25-80 mm.
Electropolished.



V9174
Universal mount stainless steel.
Standard thread 1" x 14, weight 280 grams.
Height 100 mm. (4").
Electropolished.



V9175
Universal mount reinforced nylon.
Standard thread 1" x 14, weight 50 grams.
Height 100 mm. (4")



DPV9176

Universal mount stainless steel.

L masthead bracket 1" x 14 thread

Height 155 mm (8"). 4x M6 mounting holes

Not electropolished

INTERFACE

Features	<p>6535S</p> <ul style="list-style-type: none">• Universal mount stainless steel.• Standard thread 1" x 14, weight 300 grams.• Height 100 mm. (4")• Base is circular, diameter is 73.02mm (2.875 inches) <p>6538S</p> <ul style="list-style-type: none">• Universal mount stainless steel.• Standard thread 1" x 14, weight 150 grams.• Height 41.275 mm. (1.625")• Base is circular, diameter is 69.85mm (2.75 inches) <p>6538N</p> <ul style="list-style-type: none">• Universal mount reinforced nylon.• Standard thread 1" x 14, weight 50 grams.• Height 41.275 mm. (1.625")• Base is circular, diameter is 69.85mm (2.75 inches)
----------	---

V9171

- Pipe mounting bracket in stainless steel, thread 1"x14.
- For horizontal and vertical mount.
- Weight 600 gr. For tubes diam. 25-80 mm.
- Electropolished.

V9174

- Universal mount stainless steel.
- Standard thread 1" x 14, weight 280 grams.
- Height 100 mm. (4").
- Electropolished.

V9175

- Universal mount reinforced nylon.
- Standard thread 1" x 14, weight 50 grams.
- Height 100 mm. (4")

DPV9176

- Universal mount stainless steel.
- L masthead bracket 1" x 14 thread
- Height 155 mm (8"). 4x M6 mounting holes
- Not electropolished

Connections

All have standard with 1" x 14 thread
Compatible with all Trimble Bullet and all Trimble Acutime variants

GENERAL

Mechanical

Some drawings are above

Temperature

Temperature range (operation): -40 to +85° C

Temperature range (storage): -40 to +85° C

Weight

6535S: 300g

6538S: 150g

6538N: 50g

V9171: 600g

V9174: 240g

V9175: 100g

DPV9176: 200g

Warranty	1 Year
RoHS	Compliant

ORDERING DETAILS

Board	6535S Universal mount stainless steel, thread 1" x 14, height 4" 6538S Universal mount stainless steel, thread 1" x 14, height 1.62" 6538N Universal mount nylon, thread 1" x 14, height 1.62" V9171 Pipe mounting bracket in stainless steel, thread 1"x14. V9174 Universal mount stainless steel, thread 1" x 14, height 4" V9175 Universal mount reinforced nylon, thread 1" x 14, height 4" DPV9176 Universal mount stainless steel, thread 1" x 14, height 155mm
Accessories	N/A