Miniature Capsule Slip Ring LPM-06G

This unit can be used in any electromechanical system that requires unrestrained, continuous rotation while transferring power or data from a stationary to a rotating structure. It's the key apparatus of various precision rotary worktable, electric test instrument, manufacture and process control instrument.

The LPM-06G miniature slip ring is a standard, off-the-shelf unit that uses gold contacts at the rotary interface. Color-coded lead wires are used on both the stator and rotor for simplifying electrical connections. The LPM-06G allows tremendous flexibility in dealing with system size restrictions. It is available in 1 to 6 circuit configurations.

Specifications

Operating Speed	0-300 rpm
Number of Circuits	6
Voltage	240 VAC/DC
Current Rating	2 amps per circuit
Temperature Range	-20℃ to +60℃
Contact Material	Gold to Gold
Lead Size	30# silver plated copper
Lead Length	Standard 250 mm (9.843inch)
Dielectric Strength	≥500 VAC @50Hz, between each circuit
Insulation Resistance	100 MΩ @ 500 VDC
Electrical Noise	1mΩ Min

Capsule Length				
# of Circuits	L (mm)	Part No		
6	18.2	LPM-06G		

The operating life of the unit depends upon temperature, rotation speed and environment. The operating life ≥50,000,000 runs ref.





TEMPERATURE RANGE -20° C to 60° C

Applications

- **Electrical test equipment**
- Manufacturing and process control equipment
- Indexing tables
- **CCTV** pan / tilt camera mounts
- **Robotics**, rotary sensors, urgent illumination equipmen
- **Exhibit** / display equipment/Closed-circuit control
- Aviation , military , instrument, medical equipment.
- Min-type wire-rolling machine / Wind turbine generator



- **6** circuits models
- **2** amps per circuit ,240VAC/DC
- Precision assembly to provide exceptional rotational life
- Speed up to 300 rpm continuous
- Gold-Gold contacts
- Flexible, color-coded, silver-plated, lead wires
- Superior handling of low level control signals
- Metal housing optional for most commercial applications



MAXIMUM OPERATING SPEED 0-300 RPM



www.slipring.cn

Drawings

Advantage

- **V** Low torque minimize system torque budget
- Compact design to fit in the most demanding space.

JINPAT


- Smooth running
- ✓ Low electrical noise
- **V** Quick shipment per your urgent requirement
- **360** continuous rotation
- **W** High bandwidth transfer capability
- Addition of special components
- **Quick shipment**

Wre Color Code								
Wire Size	Ring #	Color	Ring #	Color	Ring #	Color	Ring #	Color
AWG17# silver plated copper Teflon UL	#1	BLK	#2	BRN	#3	RED	#4	ORG
	#5	YEL	#6	GRN	#7	BLK-BLU	#8	PUR
	#9	GRAY	#10	WIT	#11	PINK	#12	AZURY
	#13	WIT/BLK	#14	WIT/BRN	#15	WIT/RED	#16	WIT/ORG
	#17	WIT/YET	#18	WIT/GRN	#19	WIT/BLU	#20	WIT/PUR
	#21	WIT/GRAY	#22	CLAR	#23	BLK-RED	#24	BLK/BRN

Remarks: 1. AWG28# silver plated copper Teflon UL, 24 different color single wires for a circle

2. #1 from rotor side (The color if the wire can be changed).

Contact us on wire color codes

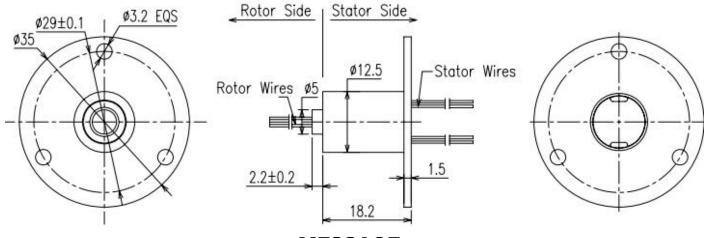

MESSAGE

Any questions about slip ring, please leave your message to get a professional solution

OL	JU		I E	GC	ж

FORJ Capsule slip ring Through bore slip ring Pancake slip ring Mercury slip ring Separate slip ring Miniature slip ring Wind turbine slip ring Hydraulic slip ring Pneumatic slip ring Coaxial rotary joints

Circuits Signal details Dimension Operating Environment Other





Model: LPM-06G

- Current&voltage
- Working speed
- Working temperature

Surveillance Crane **Medical** Marine Defence Radar antenna **Automation** Meter and instrument Wind turbine generator **VR** Device Other

