



POSITAL

FRABA


IXARC Absolute Rotary Encoder

UCD-AV003-0013-VAS0-PAM



Interface

Interface	Analog Voltage
Manual Functions	Start and End point via Cable or Connector
Video Manual	▶ Watch a simple installation video

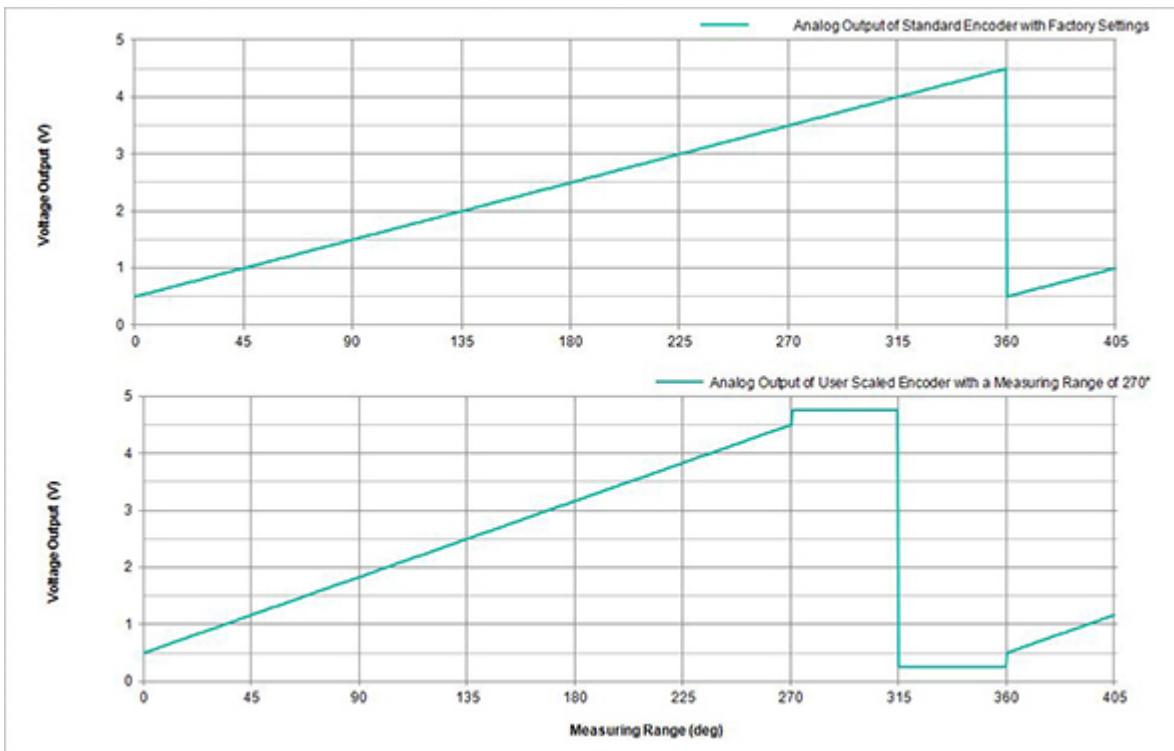

Data Sheet

Printed at 29-04-2020 14:04



POSITAL

FRABA

Electrical Data

Supply Voltage	8 - 32 VDC
Current Consumption	Typical 15 mA @24V (no load)
Start-Up Time	<500 ms
Min. Load Resistance	5 k Ω
Analog Accuracy	@ 10 V = ± 10 mV (with an ideal power supply)
Linearity	0.15%
Settling Time	32 ms (from min value to max value jump)
Reverse Polarity Protection	Yes
Short Circuit Protection	Yes
EMC: Emitted Interference	DIN EN 61000-6-4
EMC: Noise Immunity	DIN EN 61000-6-2
MTTF	300.9 years @ 40 °C

Sensor

Technology	Magnetic
Resolution Singleturn	13 bit
Resolution Multiturn	0 bit
Accuracy (INL)	$\pm 0.0878^\circ$ (≤ 12 bit)
Sense Signal (Default)	Counterclockwise shaft movement (front view on shaft)
Code	Analog Voltage 0.5 - 4.5 V
Cycle Time Base Sensor	< 100 μ s
Minimum Measurement Range	0 - 22.5°
Resolution of Output	Max. 13 bits over entire measuring range (Fractional Turns - Resolution decreases less than 13 bits when measurements range is less than 90 degrees)
Multiturn Range	Singleturn

Environmental Specifications

Protection Class (Shaft)	IP65
Protection Class (Housing)	IP65
Operating Temperature	-40 °C (-40 °F) - +85 °C (+185 °F)
Humidity	98% RH, no condensation

Mechanical Data

Housing Material	Steel
------------------	-------

Data Sheet

Printed at 29-04-2020 14:04



POSITAL

FRABA


Housing Coating	Cathodic corrosion protection (>720 hrs salt spray resistance)
Flange Type	Blind Hollow, \varnothing 36 mm / \varnothing 42 mm
Flange Material	Aluminum
Shaft Type	Blind Hollow, Depth = 18 mm
Shaft Diameter	\varnothing 10 mm (0.39")
Shaft Material	Stainless Steel V2A (1.4305, 303)
Friction Torque	\leq 3 Ncm @ 20 °C (4.2 oz-in @ 68 °F)
Max. Permissible Mechanical Speed	\leq 12000 1/min
Shock Resistance	\leq 100 g (half sine 6 ms, EN 60068-2-27)
Permanent Shock Resistance	\leq 10 g (half sine 16 ms, EN 60068-2-29)
Vibration Resistance	\leq 10 g (10 Hz - 1000 Hz, EN 60068-2-6)
Length	54,2 mm (2.13")
Weight	145 g (0.32 lb)
Maximum Axial / Radial Misalignment	Static \pm 0.3 mm / \pm 0.5 mm; Dynamic \pm 0.1 mm / \pm 0.2 mm

Electrical Connection

Connection Orientation	Axial
Connector	M12, Male, 5 pin, a coded

Certification

Approval	CE + cULus
Product Life Cycle	Established

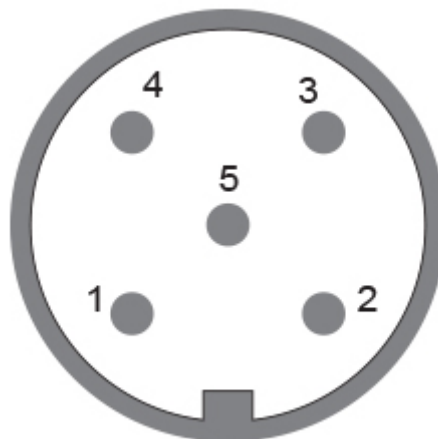

Connection Plan

SIGNAL

CONNECTOR

PIN NUMBER

Data Sheet

Printed at 29-04-2020 14:04



POSITAL

FRABA

Power Supply	Connector 1	2
GND	Connector 1	3
Analog Output	Connector 1	1
Set1/Direction	Connector 1	5
Set2/Zero Set	Connector 1	4

Connector-View on Encoder **Dimensional Drawing**

[2D Drawing](#)

Accessories

Connectors & Cables

10m PUR Cable, 5pin, A-Coded, f
POS M12 5pin-A Female+5m PUR Cable
POS M12 5pin-A Female+2m PUR Cable
POS M12 5pin-A Female+10m PUR Cable
M12, 5pin A-Coded, Female

More

Clamping Rings
Clamping Ring V12
Displays
AP22-D0 Analog Display (4 dig. o/p)
DiMod-A Analog Display

Contact



Contact Us

The picture and drawing are for general presentation purposes only. Please refer to the "Download" section for detailed technical drawings. All dimension in [inch] mm. © FRABA B.V., All rights reserved. We do not assume responsibility for technical inaccuracies or omissions. Specifications are subject to change without notice.