# **Super Miniature Slip Ring LPMS-12A**

The LPMS-12A super miniature slip ring is a standard, off-the-shelf unit that uses gold contacts at the rotary interface. And the housing material is engineering plastic or metal. Color-coded lead wires are used on both the stator and rotor for simplifying electrical connections.

The LPMS-12A allows tremendous flexibility in dealing with system size restrictions. It is available in 1-12 circuit configurations.

Specifications Specific Specif		
Operating Speed	0-300 rpm	
Number of Circuits	12 Circuits	
Voltage	240 VAC/DC	
Current Rating	1amp per circuit	
Temperature Range	-20℃ to +60℃	
Contact Material	Gold to Gold	
Wire Size	30# silver plated copper	
Wire Length	Standard 250 mm (9.843inch)	
Dielectric Strength	≥500 VAC @50Hz, between each circuit	
Insulation Resistance	1000ΜΩ@500VDC	
Electrical Noise	1mΩ Min	

Capsule Length			
# of Circuits	L (mm)	Part No	
12	24	LPMS-12A	

- The operating life of the unit depends upon temperature, rotation speed and environment.
- The operating life ≥50,000,000 runs ref.

### **Features**











- ✓ 6 circuits models
- ✓ Precision assembly to provide exceptional rotational life
- **☑** Speed up to 300 rpm continuous
- ✓ Gold to Gold contact
- **▼** Flexible, color-coded, silver-plated lead wires
- **▼** Superior handling of low level control signals
- **✓** Compatible with data bus protocols
- Metal housing optional



TEMPERATURE RANGE
-20° C to 60° C



MAXIMUM OPERATING SPEED 0-300 RPM

# **Applications**


- **☑** Electrical test equipment
- **▼** Manufacturing and process control equipment
- ✓ Indexing tables
- CTV pan / tilt camera mounts
- ▼ Robotics, rotary sensors, urgent illumination equipmen
- Exhibit / display equipment
- ▼ Min-type wire-rolling machine
- Closed-circuit control



+1 346-320-9106 sales@slipring.cn



## **Advantage**



**▼** Compact design to fit in the most demanding space

**▼** Smooth running

✓ Low electrical noise

**▼** Housing Material using engineering plastic or metal

**▼** Quick shipment per your urgent requirement

**✓** 360° continuous rotation

**✓** High bandwidth transfer capability

**✓** Addition of special components

**✓** Compact package

#### Wire Size Ring # Ring# Color Color Color Color #1 BLK #2 BRN #3 RED ORG 30# Silver Plated Copper #7 #5 YEL #6 GRN **BLK-BLU** #8 PUR #10 #9 GRAY WIT #11 PINK #12 **AZURY** #13 WIT/BLK WIT/BRN #15 WIT/RED #16 WIT/ORG #17 WIT/YET #19 WIT/BLU WIT/PUR #18 WIT/GRN #20 #21 WIT/GRAY #22 CLAR #23 **BLK-RED** #24 BLK/BRN


Remarks: 1. AWG32# silver plated copper Teflon UL, 24 different color single wires for a circle

2. #1 from rotor side (The color if the wire can be changed).

Contact us on wire color codes

# **Drawings**

Model: LPMS-12A

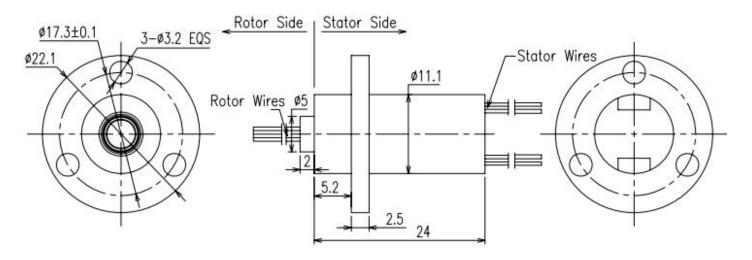

### **MESSAGE**

Any questions about slip ring, please leave your message to get a professional solution

### PRODUCT CATEGORY

FORJ

Capsule slip ring
Through bore slip ring
Pancake slip ring
Mercury slip ring
Separate slip ring
Miniature slip ring
Wind turbine slip ring
Hydraulic slip ring
Pneumatic slip ring
Coaxial rotary joints

#### REQUESTS

Circuits
Current&voltage
Signal details
Dimension
Working speed
Working temperature
Operating
Environment
Other

#### NDUSTRIES

Crane
Medical
Marine
Defence
Radar antenna
Automation
Meter and instrument
Wind turbine generator
VR Device
Other

Surveillance





+1 346-320-9106 sales@slipring.cn